
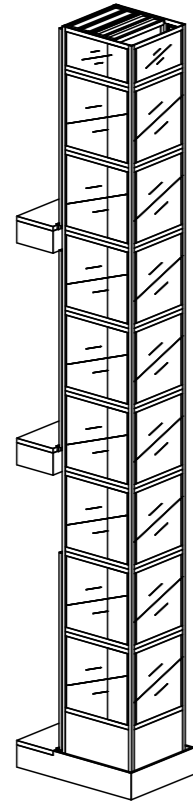



Cutout dimension see sheet  
2, forces see sheet 3

\*To be adapted on site  
\*\*Customized panel

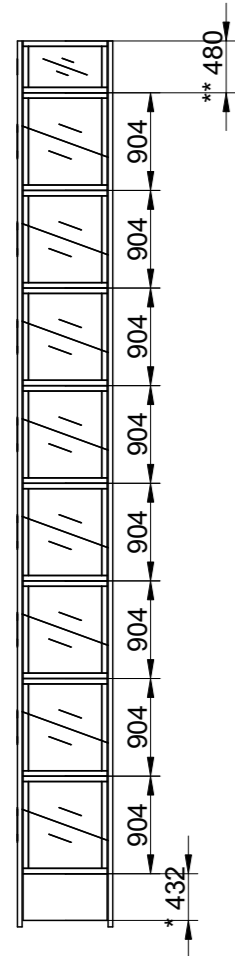


E


Positioning of machinery:




A

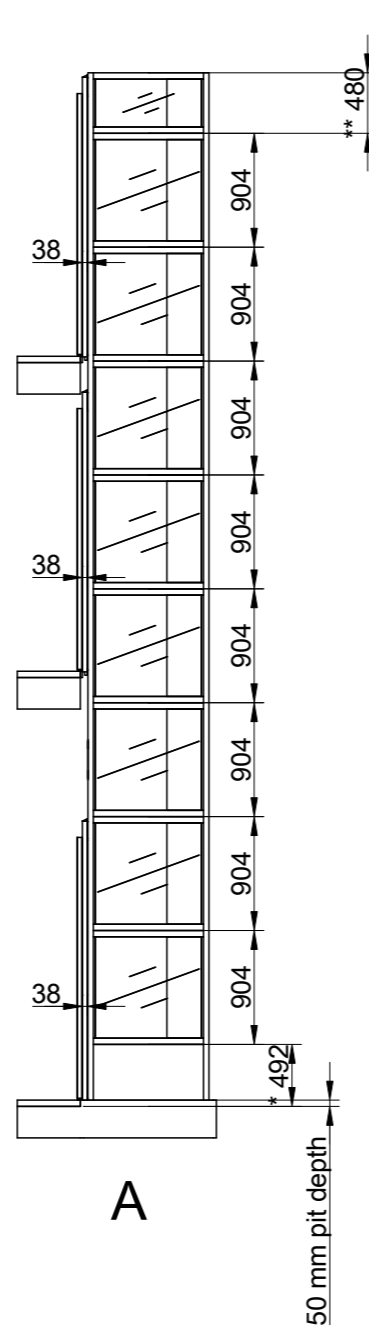


A

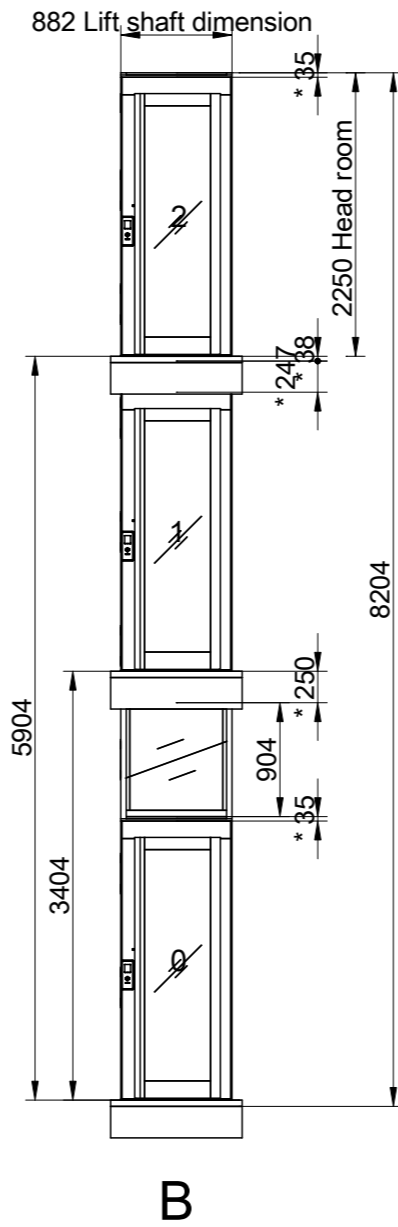

B

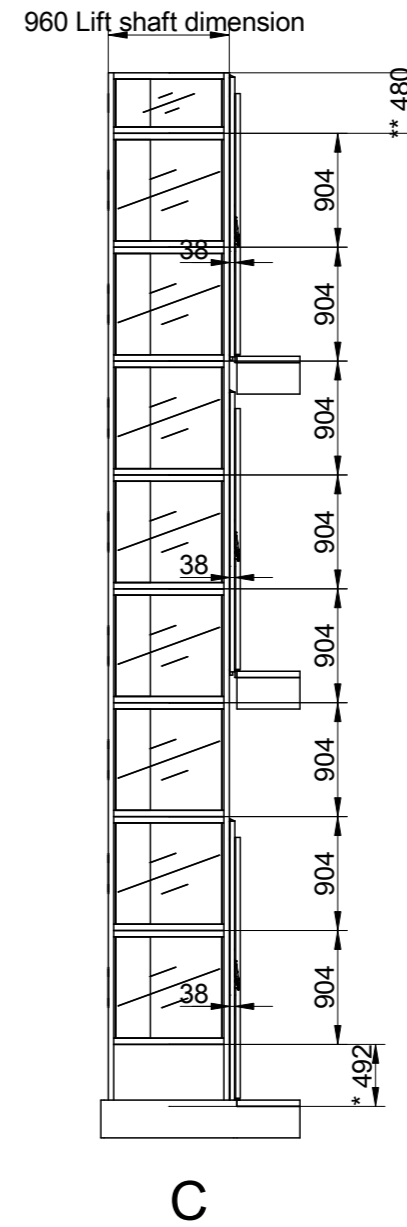

C

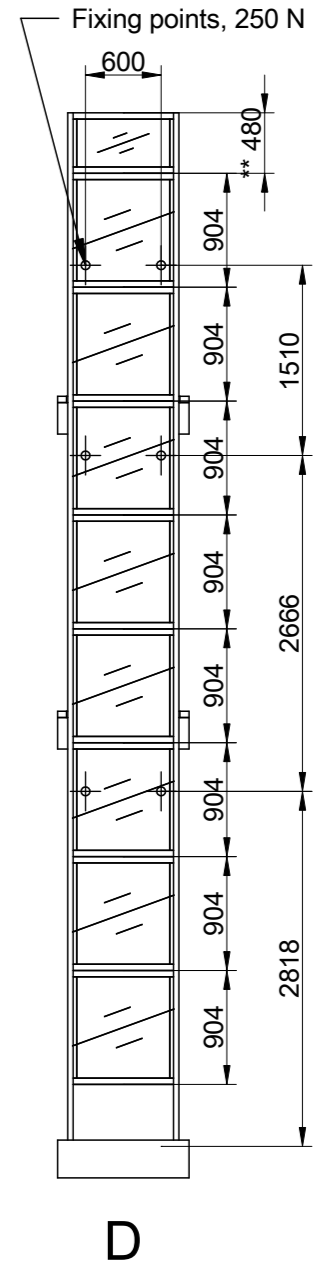

D

Options  
Freq. 1x230/240V 50-60Hz 16A Soft  
Capacity: 300,00 kg

Approved by  
builder:

European view placement:



EOS ID  
L00378497  
Tender no  
IN63223  
Order no

Principal drawing  
X70 - 600\*830  
Shaft drawing  
Kalea Kosmos X70


Gen. Tolerances SS-ISO 27681-1 m	Date 2023-04-12 15:00	sheet 1 of 7	Scale: A3, 1:60
-------------------------------------	-----------------------------	-----------------	--------------------

# Shaft cutout sizes



Lift unit installed within a shaft by others

Door front cutout sizes		
Landing	Width	Height
B 0	993	2250
B 1	993	2250
B 2	993	2250

B1,2 (1:5)

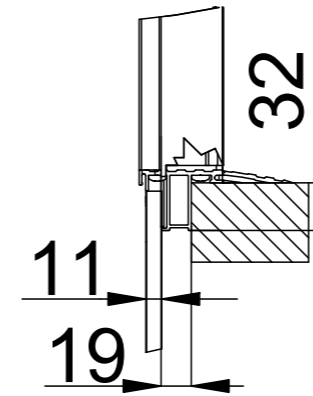

B0 (1:5)

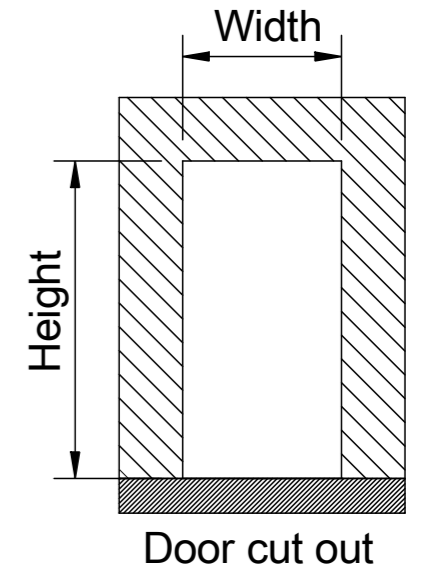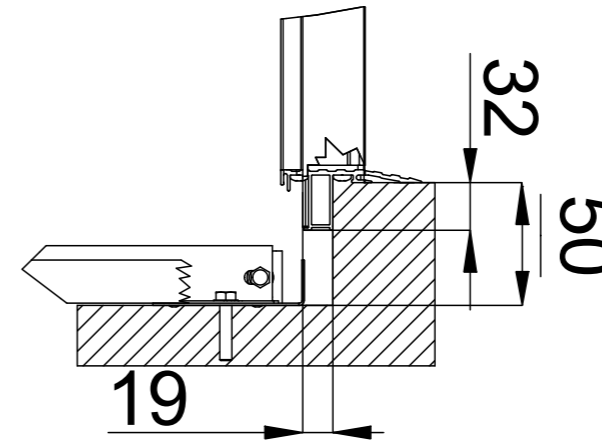

Incoming power supply is connected at landing:

For wiring and power supply, refer to the unit's wiring diagrams.  
Ceiling shaft lighting, is independent from the power cable and pulled back into the trench's upper part. Shaft lighting > 50 lux.

NOTE! An effective emergency telephone is required for approved inspection.  
The purchaser is responsible for an active phone line being present prior to the lift installation.



The incoming telephone line is connected to CiLow (TELE). Refer to wiring diagram.

The emergency signal device is powered by the lift's own battery in the event of a power failure.



The lift must be equipped with a two-way communication, either via the standard telephone or via the lift telephone, which automatically calls the alarm control center or the like.

NOTE! A lift featuring a frequency converter cannot be directly connected to a RCD.

NOTE! The platform lift shall be connected to a dedicated power supply conforming with EN 60204-1:2018, terminating at a main switch and fuse or overload with a means to lock it in the 'off' position or disconnected state

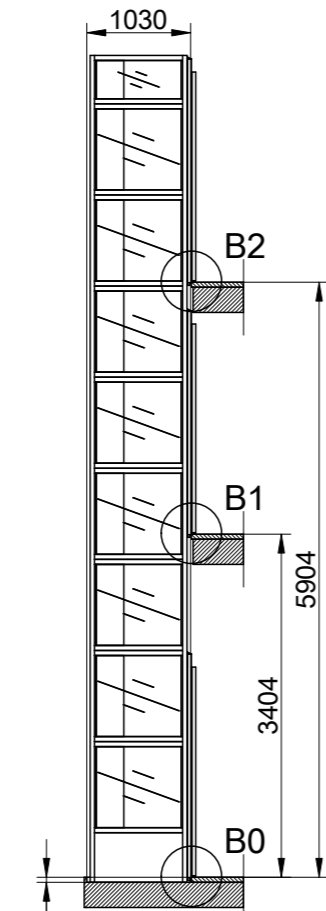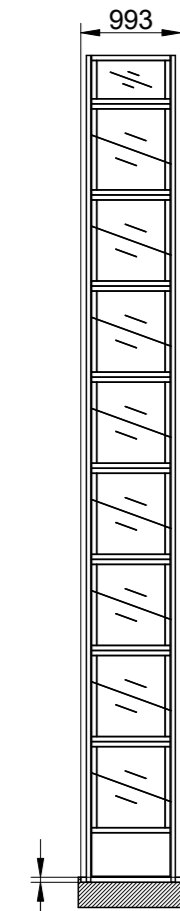

50 mm pit depth + 10 mm, - 0 mm.  
Bottom surface must be flat

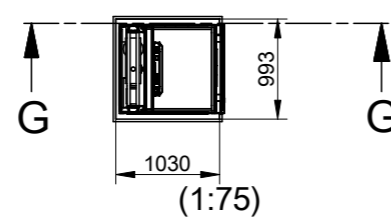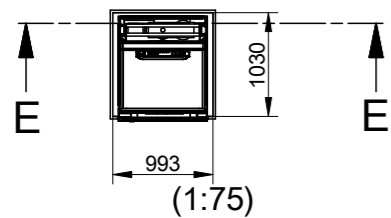

Approved by builder:

European view placement:



EOS ID  
L00378497  
Tender no  
IN63223  
Order no

Principal drawing  
X70 - 600\*830  
Cut out sizes  
Kalea Kosmos X70


Gen. Tolerances SS-ISO 27681-1 m	Date 2023-04-12 15:00	sheet 2 of 7	Scale: A3, 1:60
-------------------------------------	-----------------------------	-----------------	--------------------

6 5 4 3 2 1

Loads sustained by shaft and platform  
and fixing points bottom frame

Recommended positioning of fixing points.  
Loads per fixing point, F=250 N



A (1:5)

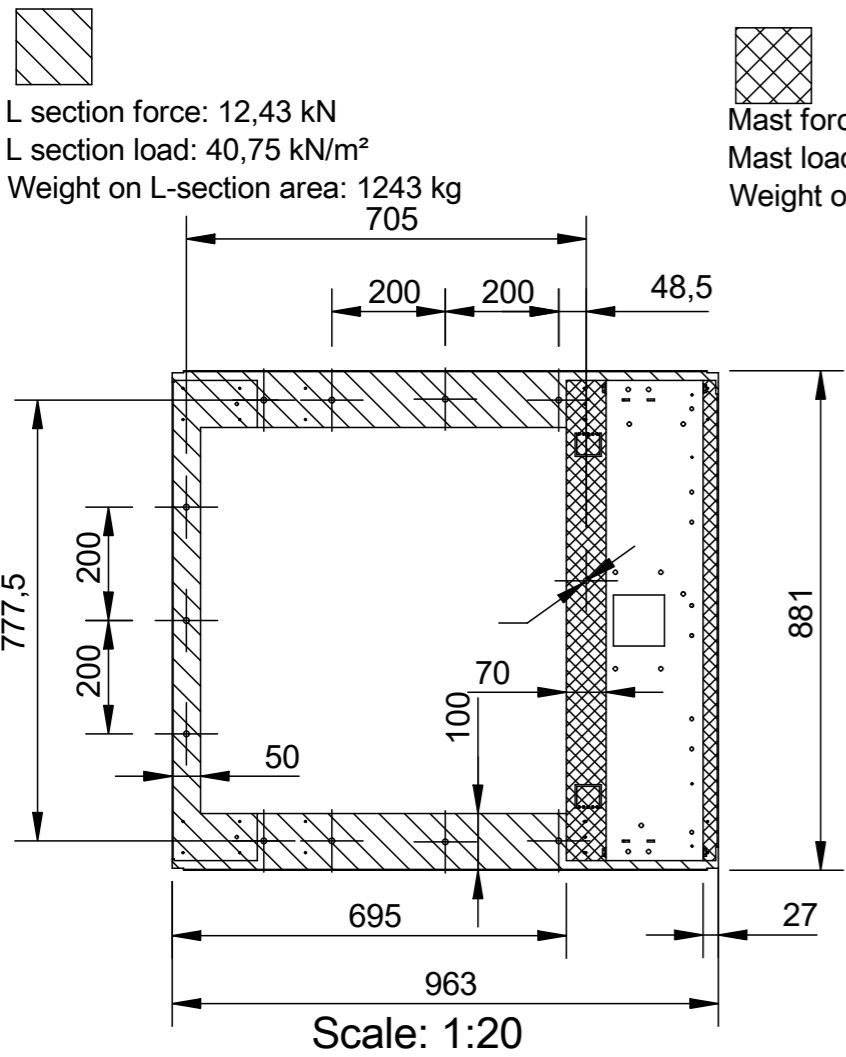

L section force: 12,43 kN  
L section load: 40,75 kN/m<sup>2</sup>  
Weight on L-section area: 1243 kg

Mast force: 5,74 kN  
Mast load: 46,29 kN/m<sup>2</sup>  
Weight on mast area: 574 kg

Total weight of the lift equipment  
(including rated load): 1817 kg

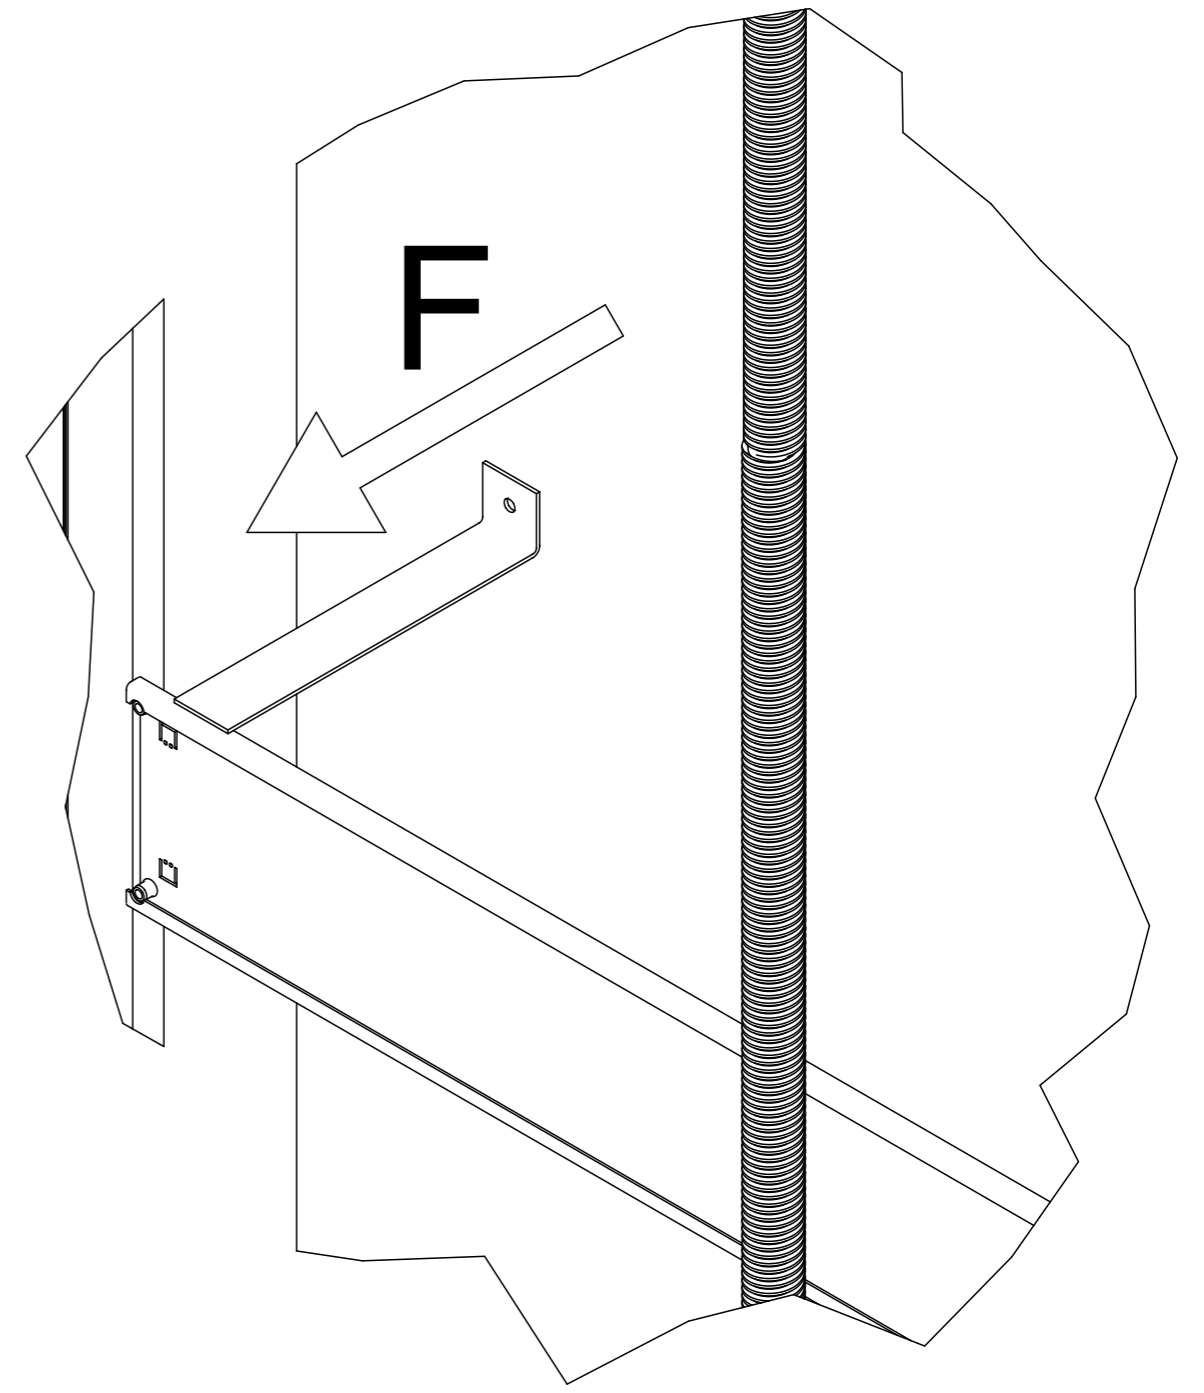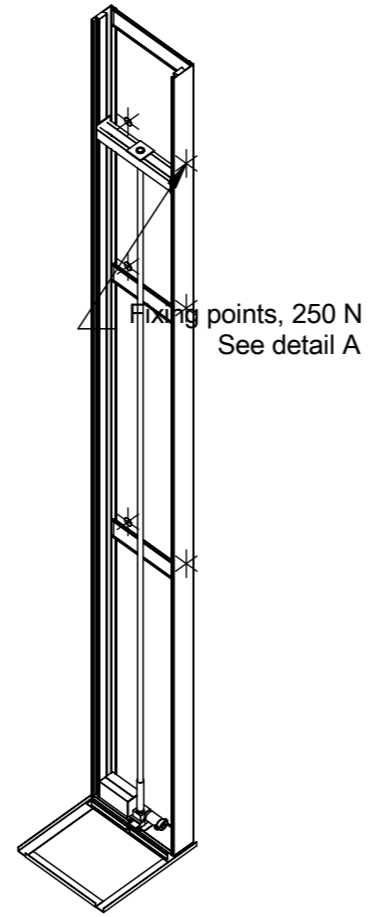

D  
C  
B  
A

D  
C  
B  
A

Approved by  
builder:  
\_\_\_\_\_

European view placement:







EOS ID  
L00378497  
Tender no  
IN63223  
Order no

Principal drawing  
X70 - 600\*830  
Loads and forces  
Kalea Kosmos X70



Gen. Tolerances SS-ISO 27681-1 m	Date 2023-04-12 15:00	sheet 3 of 7	Scale: A3, 1:60
-------------------------------------	-----------------------------	-----------------	--------------------

6 5 4 3 2 1


Landing 0 and door front information  
Scale: 1:20

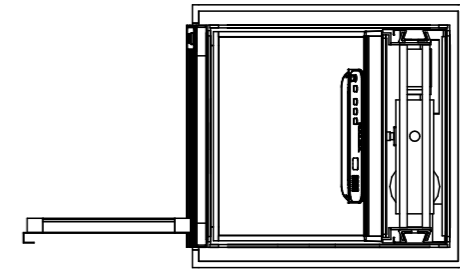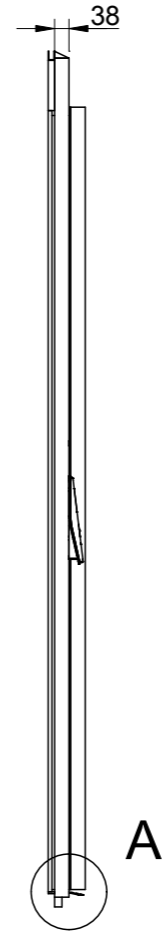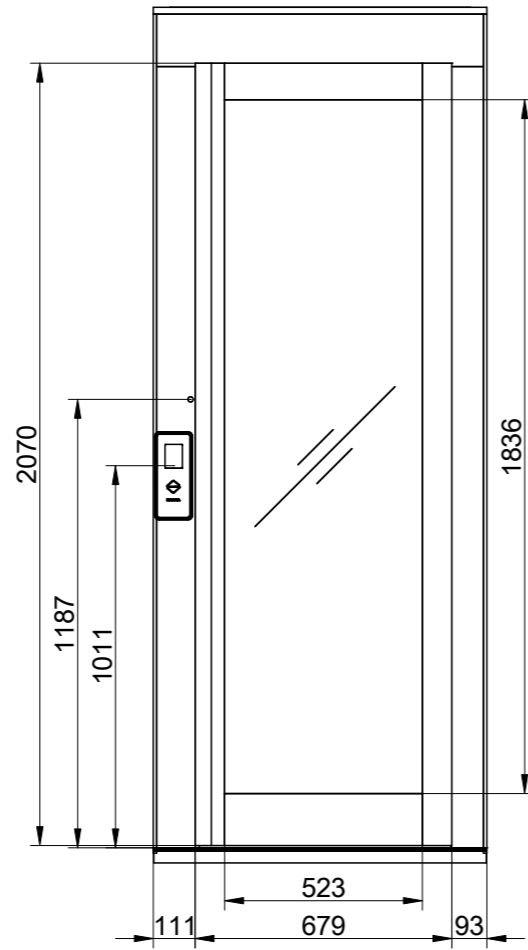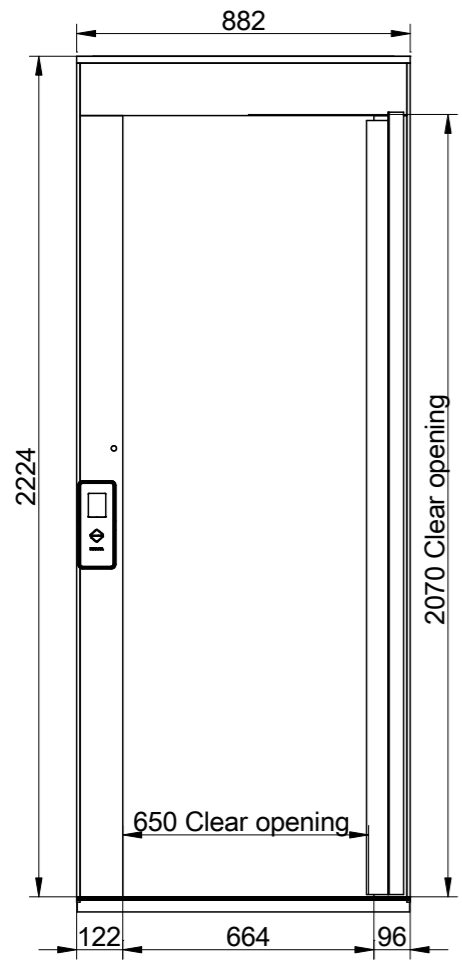

Scale: 1:30

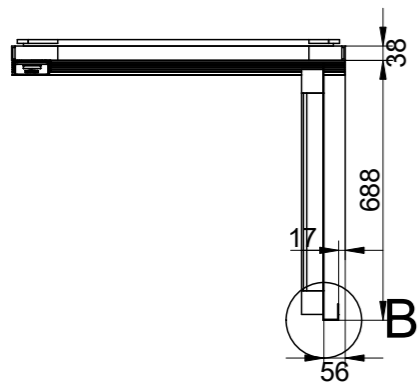



B (1:10)







A (1:5)



Landing	Door type
0	AL5
1	AL5
2	AL5

Approved by builder:  _____	<b>KALEA</b> 	EOS ID L00378497	<b>Principal drawing</b> X70 - 600*830 Landing information Kalea Kosmos X70			
		Tender no IN63223				
European view placement: 		Order no	Gen. Tolerances SS-ISO 27681-1 m	Date 2023-04-12 15:00	sheet 4 of 7	Scale: A3, 1:60


Landing 1 and door front information  
Scale: 1:20

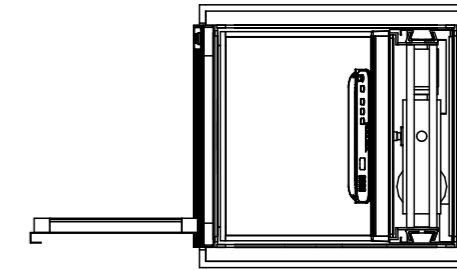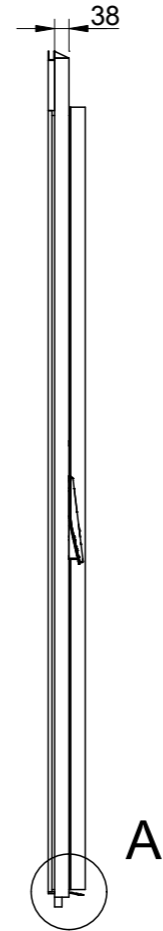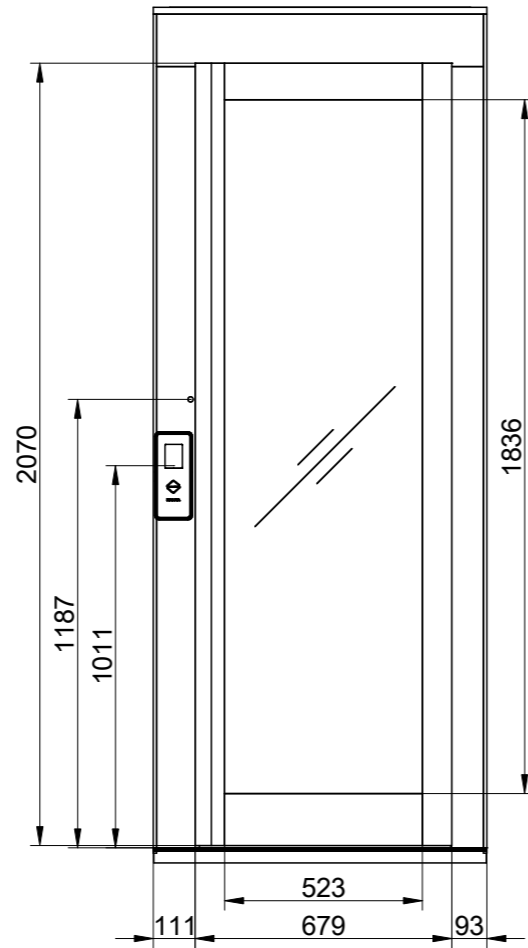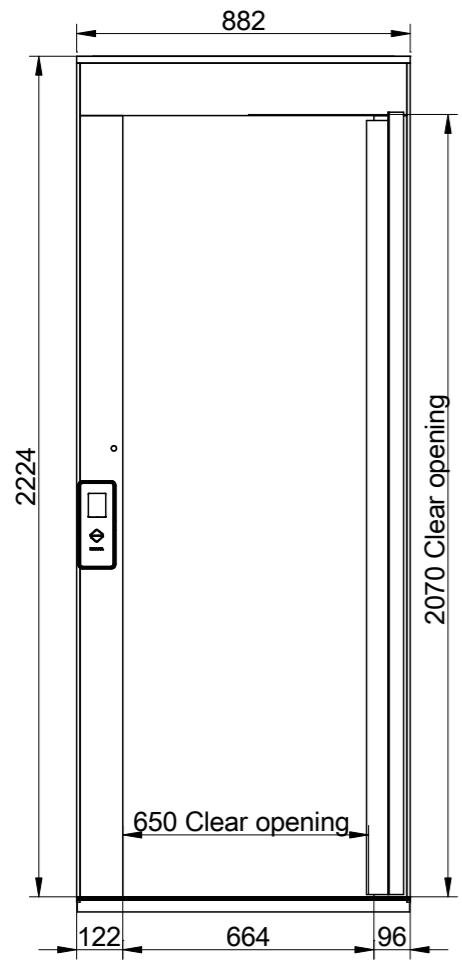

Scale: 1:30

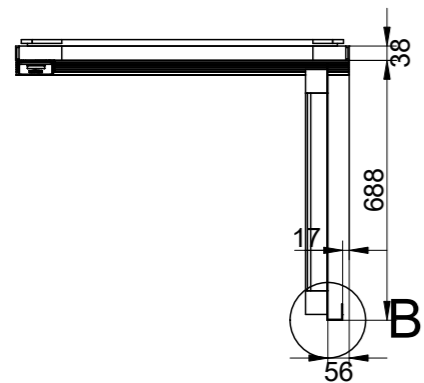

B (1:10)







A (1:5)



Landing	Door type
0	AL5
1	AL5
2	AL5

Approved by builder:  _____	<b>KALEA</b> LIFTS	EOS ID L00378497	<b>Principal drawing</b> X70 - 600*830 Landing information Kalea Kosmos X70		
		Tender no IN63223			
European view placement:		Order no	Date 2023-04-12	sheet 5 of 7	Scale: A3, 1:60
		Gen. Tolerances SS-ISO 27681-1 m	15:00		


Landing 2 and door front information  
Scale: 1:20

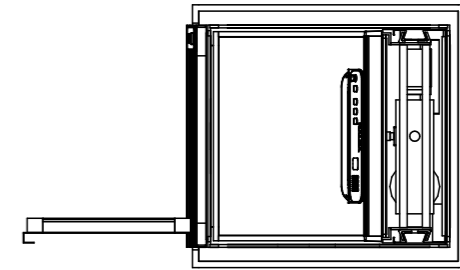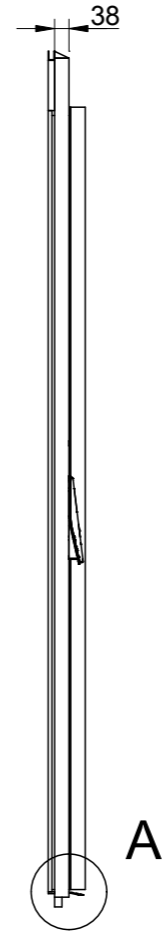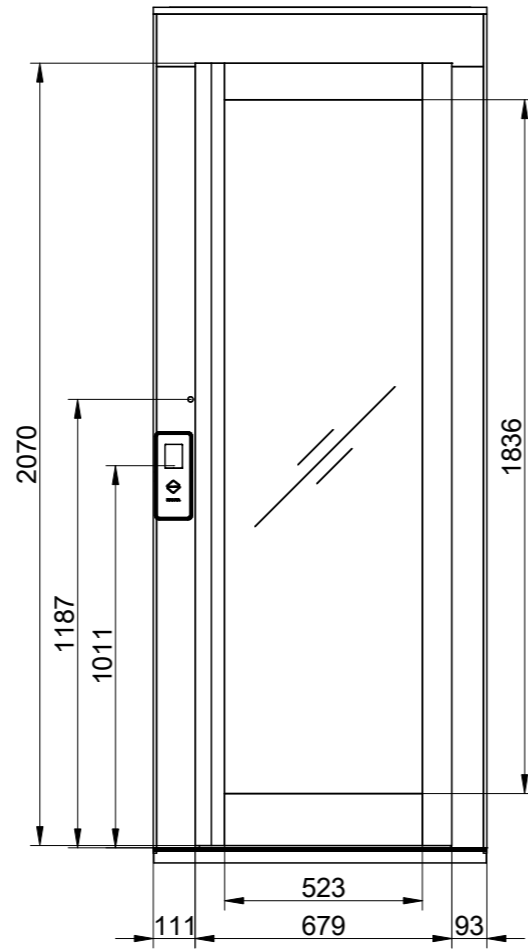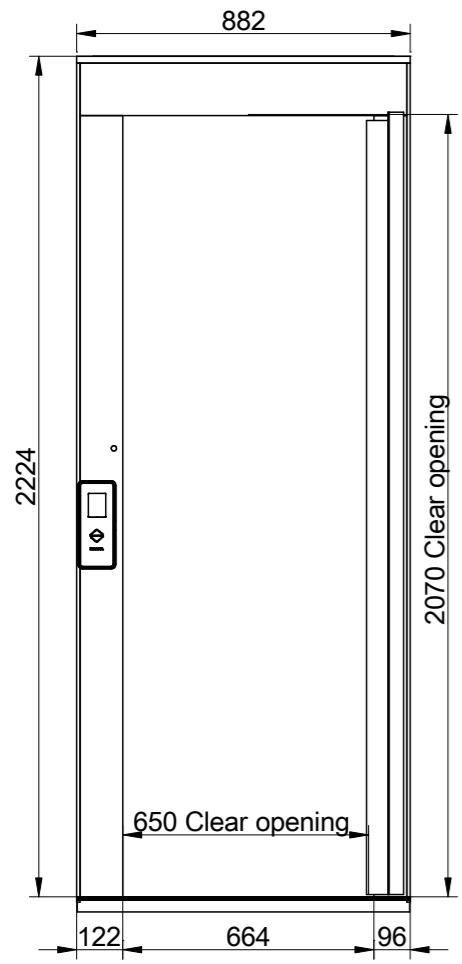

Scale: 1:30

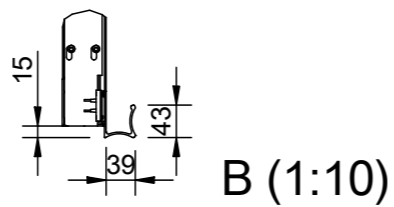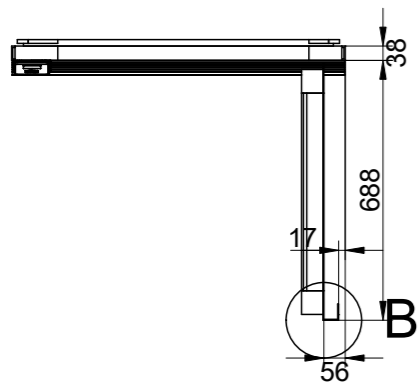

B (1:10)



A (1:5)

Landing	Door type
0	AL5
1	AL5
2	AL5

Approved by  
builder:

European view placement:



EOS ID  
L00378497  
Tender no  
IN63223  
Order no

Principal drawing  
X70 - 600\*830  
Landing information  
Kalea Kosmos X70

Gen. Tolerances  
SS-ISO 27681-1 m




Date  
2023-04-12  
15:00

sheet  
6 of 7


Scale:  
A3, 1:60

6 5 4 3 2 1


**Platform layout**  
Scale: 1:20

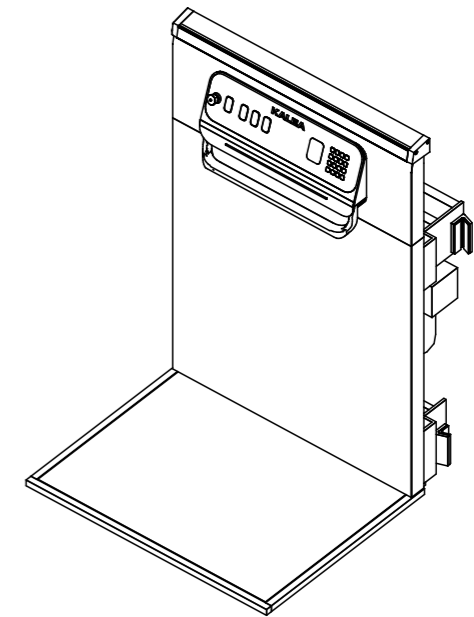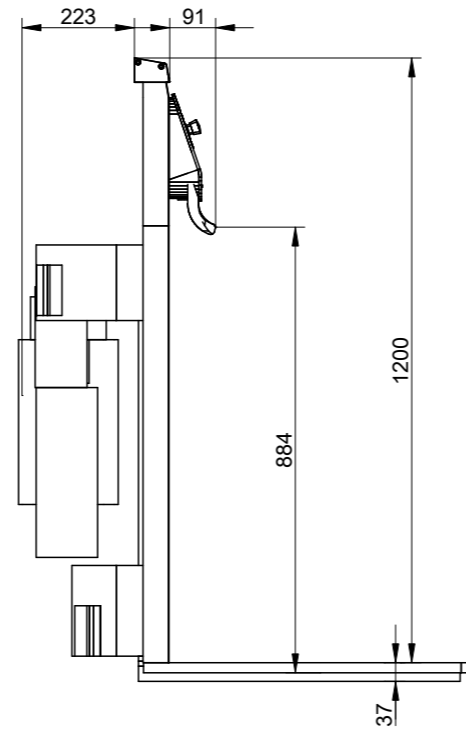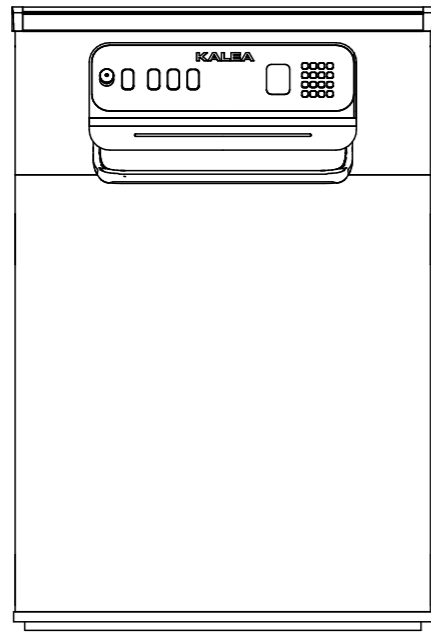

**Button layout**  
Scale: 1:8

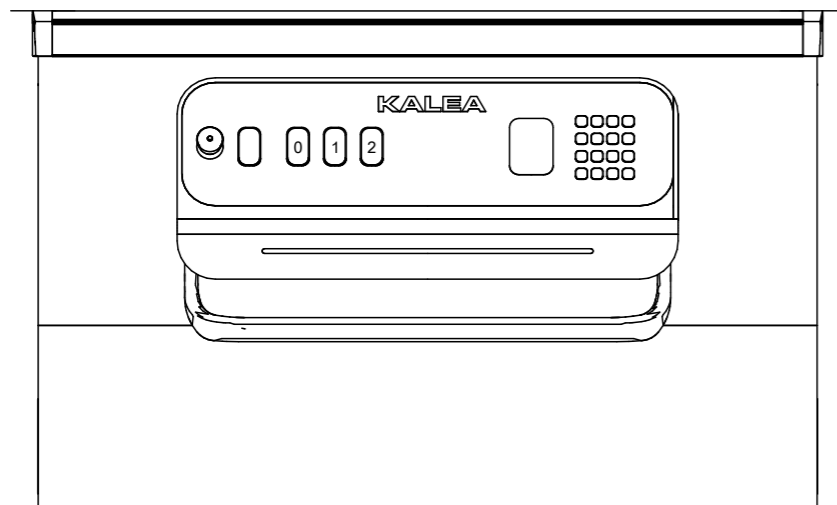

**Platform dimensions**  
Scale: 1:15

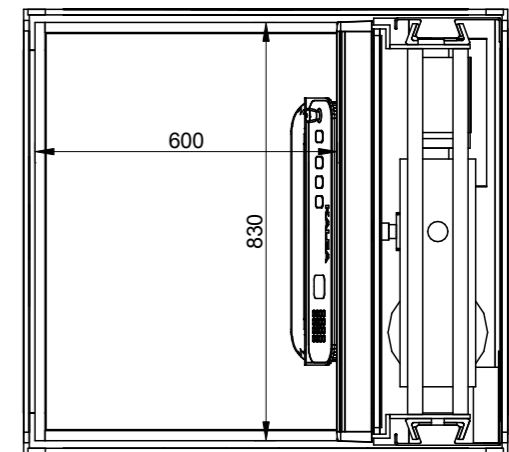

D

C

B

A

D

C

B

A

Approved by  
builder:

European view placement:



EOS ID  
L00378497

Tender no  
IN63223

Order no

Gen. Tolerances  
SS-ISO 27681-1 m

**Principal drawing**  
X70 - 600\*830  
Platform layout  
Kalea Kosmos X70

Date  
2023-04-12  
15:00

sheet  
7 of 7

Scale:  
A3, 1:60

6 5 4 3 2 1