



ACCESSIBILITY RANGE
ACCESS PRO DDA LIFT

KALEA 
LIFTS

Access Pro

DDA COMPLIANT

The Access Pro Lift was designed specifically to meet Australia's stringent DDA standards. From double COP to handrail and clearance requirements, the Access Pro lift checks all the boxes for a worry-free accessibility solution.

- Screw-driven platform lift
- Ultra space-saving
- No Machine Room
- Low headroom
- Own glass / steel / aluminum shaft
- Low 100 mm pit (or 0 mm with a ramp)
- Whisper quiet operation
- Low energy consumption



Cibes Lift Group, including Kalea Lifts, is a Swedish manufacturer of space-efficient home and public lifts, founded in 1947 and now operating in more than 70 countries with around 1,800 employees.

We design lifts known for Scandinavian design, fast installation, and user-friendly technology. Our mission is to redefine accessibility worldwide by making safe, stylish, and sustainable vertical mobility available to people everywhere.






Final Design ©2025

DUAL CONTROL PANELS



EXTRA TOUGH ACCESS PANEL

The Access Pro DDA lift comes with a waterproof and weather-resistant stainless steel patterned access panel to protect from any vandalism and ensure the longevity of the lift even in sensitive locations.



ANTI-SLIP CHECKERPLATE FLOORING

Our anti-slip checker plate flooring is extra-tough, super resistant and extremely aesthetic due to its black color and polished edges. Perfect for durability and easy cleaning.



PREMIUM WHITE POWDERCOAT (Black Optional)


The DDA lift comes in a premium white powdercoat as standard, in matte finish to ensure ease of maintenance and extra durability even when handled roughly!



CUTTING-EDGE

SCREW-DRIVEN TECHNOLOGY

TYPICAL TRACTION

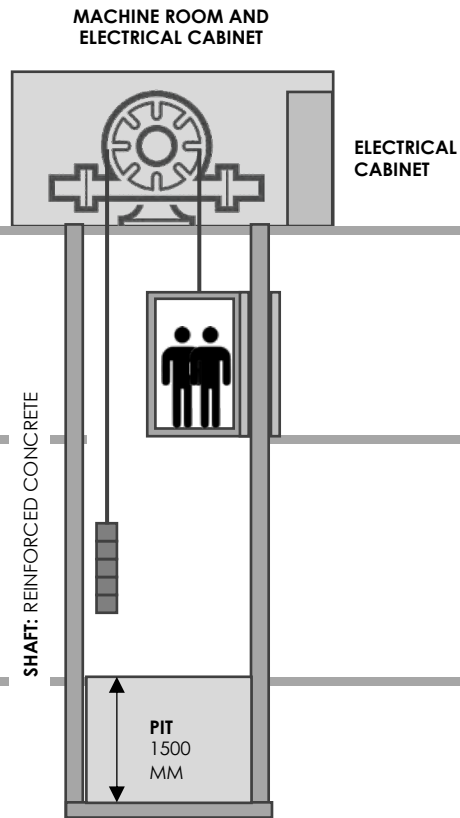


CIBES SCREW-DRIVE

NO HEADROOM NEEDED

PIT
0 - 50 MM

HOW A SCREW DRIVE MECHANISM WORKS

DID YOU KNOW?

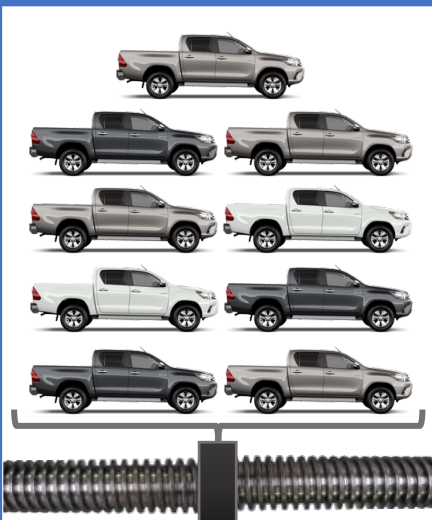

Our screw is so strong that if you place the weight of 9 pick-up trucks on the weakest point (the joint), it still won't break!



The lift is attached to a nut on an endless screw



If the nut rotates one way, the lift goes down




If the nut rotates the other way, the lift goes up!

EXCEPTIONAL ADVANTAGES

SUPER SPACE SAVING


MORE STANDING SPACE - HIGHER UTILIZATION

TRADITIONAL CABIN LIFT

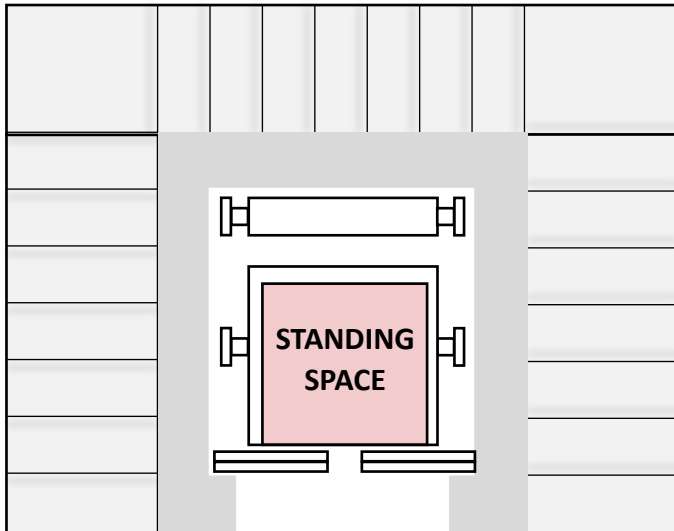


SPACE INSIDE OF LIFT:
0.6 sqm

KALEA PLATFORM LIFT

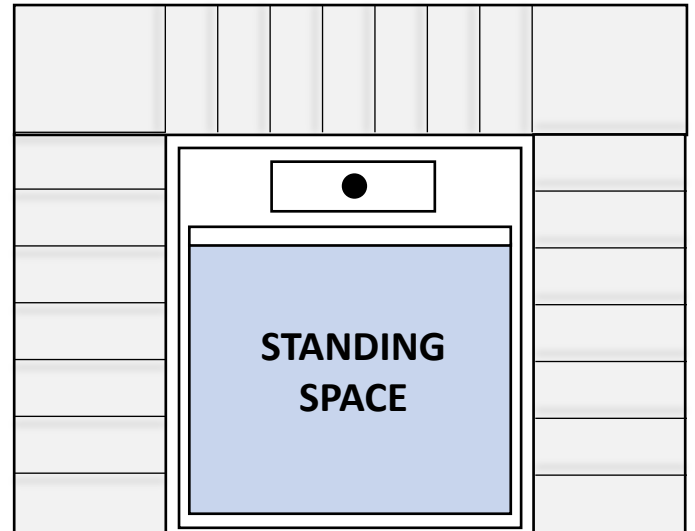


SPACE INSIDE OF LIFT:
1.5 sqm

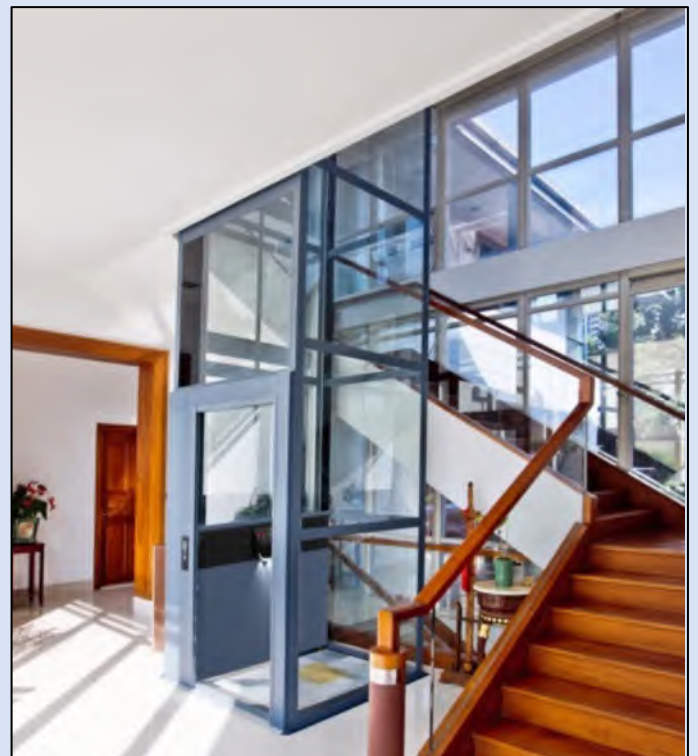

TECHNICAL SPECIFICATIONS

LIFT DIMENSIONS

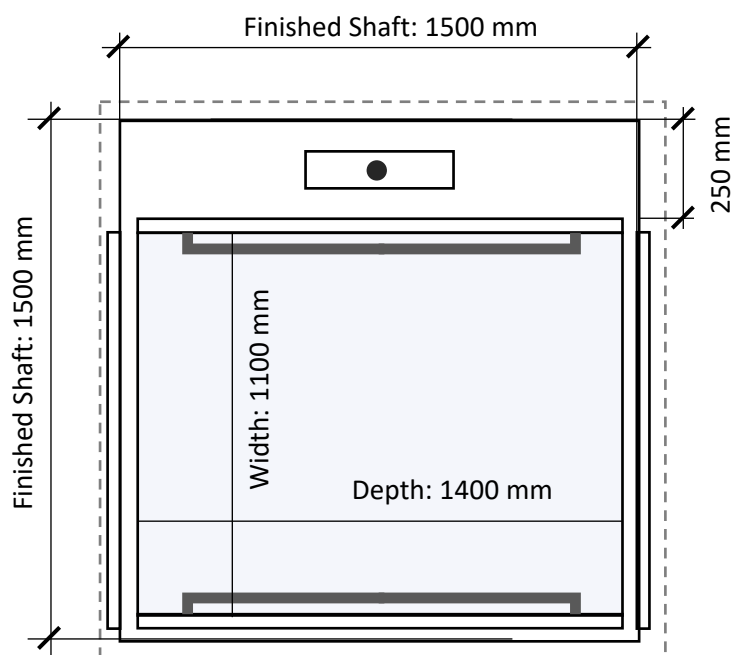

For CUT-OUT SIZE, allow 20 mm extra on each side, and an additional 30 mm on side adjacent the door for each door

DOOR DIMENSIONS & DETAILS

SWING DOOR RIGHT HINGE	Door Blade 1000 mm Clear Door Open 954 mm	- 2100 mm clear height opening - Semi automatic - Hidden automatic door opener optional - Black handrail standard
SWING DOOR LEFT HINGE	Clear Door Open 954 mm Door Blade 1000 mm	- 2100 mm clear height opening - Semi automatic - Hidden automatic door opener optional - Black handrail standard
SALOON DOOR	Door Blade 500 mm Clear Door Open 916 mm	- 2100 mm clear height opening - Full automatic - No handrails

MAX # OF STOPS	3 stops
MAX TRAVEL HEIGHT	6,000 mm
POWER SUPPLY	1 x 230V / 3 x 400V
OVERHEAD	2400 mm
OVERHEAD (w/ outdoor roof)	2700 mm
BOTTOM PIT	100 - 120 mm (0 mm with ramp)
MACHINE ROOM	None
ELECTRICAL CABINET	None
LOCATION	Indoor / Outdoor
COP PLACEMENT	Dual Side
RATED LOAD	400 kg
RATED POWER	3 kW
MOTOR TYPE	Asynchronous Motor by Motovario
SHAFT TYPE	Glass / Steel Panels 360° panoramic
GLASS TYPE	Frameless
SPEED	0.15 m/s
PRODUCT STANDARD	EN81-41 DDA Compliant
EMERGENCY PHONE	Landline or SIM
REMOTE MONITORING	Through IoT
COLOR OPTIONS	White (Standard) Black (Optional)
EXHAUST FAN	Standard with Outdoor Roof

DESIGN & ACCESSORIES



OPTIONS & ACCESSORIES



CALL BUTTON
IP65 RATED



**PASSWORD /
FINGERPRINT LOCK**
Cannot be used with post
IP67 RATED



CALL POST
For Remote
Openings
IP65 RATED

IMPORTANT DDA COMPLIANCE NOTES

HANDRAIL

Must be uninterrupted, round shape, minimum 600 mm long with rounded edges.

50 mm clearance from each wall, 900 mm high from platform floor.

BUTTONS

Must be 50 mm in diameter, illuminated and with braille.

Must have an alarm / phone button. Between 900 mm and 1100 mm from platform floor.

THE ACCESS PRO DDA LIFT FULLY COMPLIES WITH THE ABOVE



LIFTS FOR LIFE

☎ **1800 695 438**

✉ sales@lifts4life.com.au

🌐 www.lifts4life.com.au

OUR SHOWROOM



1/28 Shaban St,
Albion Park Rail
NSW 2527